


Technical Specifications



Technical Specifications for Lubricated Reciprocating Compressors.

SINGLE STAGE

Model	Motor Rating HP	No. of Cylinders	Piston Displacement		Max. Pressure		Tank Capacity
			LPM	CFM	PSIG.	Kg/ cm ²	Litres
TLS10-10	1	1	130	4.6	142	10	40
TLS20-10	2	1	250	8.8	142	10	80
TLS30-10	3	2	380	13.4	142	10	80
TLS50-10	5	2	620	21.9	142	10	160
TLS750-10	7.5	2	920	32.5	142	10	250
TLS100-10	10	2	1250	44.2	142	10	250

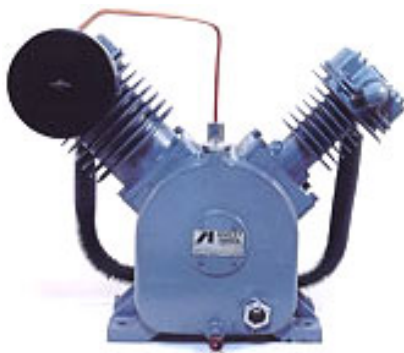

TWO STAGE

Model	Motor Rating HP	No. of Cylinders	Piston Displacement	Max. Pressure	Tank Capacity

			LPM	CFM	PSIG.	Kg/cm ²	Litres
TLT30-14	3	2		9.81	200	14	80
TLT50-14	5	2	445	15.7	200	14	160
TLT75-14	7.5	2	780	24.7	200	14	250
TLT100-14	10	3	920	32.5	200	14	250
TLT125-10	12.5	3	1320	46.6	142	10	250
TLT125-14	12.5	3	1180	41.55	200	14	300
TLT150-7	15	3	1620	57.2	100	7	250
TLT150-12	15	3	1470	51.9	171	12	300

Technical Specifications for Oil-Free Reciprocating Compressors.

SINGLE STAGE							
Model	Motor Rating HP	No. of Cylinders	Piston Displacement		Max. Pressure		Tank Capacity
			LPM	CFM	PSIG.	Kg/cm ²	Litres
TFS 10-10	1	1	151	5.34	128	9	40
TFS 20-10	2	1	267	9.44	128	9	80
TFS 30-10	3	2	408	14.41	128	9	80

TWO STAGE							
Model	Motor Rating HP	No. of Cylinders	Piston Displacement		Max. Pressure		Tank Capacity
			LPM	CFM	PSIG.	Kg/cm ²	Litres
TFT 50-10	5	2	649	22.93	128	9	160
TFT 75-10	7.5	2	692	24.43	128	9	250
TFT 100-10	10	3	1038	36.66	128	9	250
TFT 150-10	15	3	1619	57.18	128	9	300

CLOSE